

07/13/00

J0715 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
FQ5-481

J0836 U.S. PTO

09/15/99

07/13/00

**To the Assistant Commissioner for Patents:**

Transmitted herewith for filing is the patent application of:

Rei MIYAMOTO

corresponding to Japanese application 199510/1999, filed July 13, 1999,

entitled: CALL ADMISSION CONTROL METHOD AND SYSTEM

Enclosed are:

- |                                     |                                                                                                                                                                                                                                                                                                        |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | 15 pages of specification.                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | 5 sheets of formal drawings.                                                                                                                                                                                                                                                                           |
| <input checked="" type="checkbox"/> | a newly-executed declaration of the inventor.                                                                                                                                                                                                                                                          |
| <input type="checkbox"/>            | a copy of an executed declaration of the inventor from prior application Serial No. , filed .                                                                                                                                                                                                          |
| <input type="checkbox"/>            | incorporation by reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied as indicated in the preceding box, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein. |
| <input checked="" type="checkbox"/> | an assignment of the invention to NEC CORPORATION, including assignment cover sheet.                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | Information Disclosure Statement with Form PTO-1449.                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | copies of the Information Disclosure Statement citations.                                                                                                                                                                                                                                              |
| <input type="checkbox"/>            | preliminary amendment.                                                                                                                                                                                                                                                                                 |
| <input checked="" type="checkbox"/> | return receipt postcard (MPEP 503), specifically itemized.                                                                                                                                                                                                                                             |
| <input type="checkbox"/>            | a verified statement to establish small entity status under 37 CFR 1.9 and 1.27.                                                                                                                                                                                                                       |
| <input type="checkbox"/>            | a verified statement to establish small entity status filed in prior application. Status is still proper and desired.                                                                                                                                                                                  |
| <input type="checkbox"/>            | a certified copy of the Priority Document.                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | other: inventor information sheet.                                                                                                                                                                                                                                                                     |

If a CONTINUING APPLICATION, check appropriate box and supply the requisite information.

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP)

of prior application No. , filed .

- |                                     |                                                                                                              |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | Customer No. 000466.                                                                                         |
| <input checked="" type="checkbox"/> | Correspondence address is: YOUNG & THOMPSON, 745 South 23rd Street, Second Floor, Arlington, Virginia 22202. |
| <input checked="" type="checkbox"/> | Telephone: (703) 521-2297. Telefax: (703) 685-0573 or (703) 979-4709.                                        |

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER**  
(continued)

Docket No.  
FQ5-481

**CLAIMS AS FILED**

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE			\$ 690	\$ 690
TOTAL CLAIMS	10 - 20 =	0	x\$ 18	0
INDEPENDENT CLAIMS	3 - 3 =	0	x\$ 78	0
MULTIPLE DEPENDENT CLAIM PRESENT			\$ 260	

**TOTAL** \$ 690

If applicant has small entity status under 37  
CFR 1.9 and 1.27, then divide total fee by 2,  
and enter amount here.

**SMALL ENTITY  
TOTAL**

\$

☒

A check in the amount of \$730 to cover the filing fee is enclosed.

☒

The Commissioner is hereby authorized to charge indicated fees and credit any over-  
payments to Deposit Account No. 25-0120 in the name of Young & Thompson, as  
described below. A duplicate copy of this sheet is enclosed.

☒

Charge the amount of \$ as filing fee.

☒

Credit any overpayment.

☒

Charge any additional fee required under 37 CFR 1.16 and 1.17, during  
the pendency of this application.

Charge the issue fee set in 37 CFR 1.18 at the mailing of the Notice of  
Allowance.



Andrew J. Patch  
Registration No. 32,925  
745 South 23rd Street  
Arlington, VA 22202  
Telephone 703/521-2297

July 13, 2000

INVENTOR INFORMATION

Inventor One Given Name:: REI  
Family Name:: MIYAMOTO  
Postal Address Line One:: C/O NEC CORPORATION  
Postal Address Line Two:: 7-1, SHIBA 5-CHOME, MINATO-KU  
City:: TOKYO  
Country:: JAPAN  
City of Residence:: TOKYO  
Country of Residence:: JAPAN  
Citizenship Country:: JAPAN

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 000466  
Name Line One:: YOUNG & THOMPSON  
Address Line One:: 745 SOUTH 23RD STREET  
Address Line Two:: SECOND FLOOR  
City:: ARLINGTON  
State or Province:: VIRGINIA  
Country:: U.S.A.  
Postal or Zip Code:: 22202  
Telephone:: 703-521-2297  
Fax One:: 703-685-0573  
Fax Two:: 703-979-4709

APPLICATION INFORMATION

Title Line One:: CALL ADMISSION CONTROL METHOD AND SYSTEM  
Total Drawing Sheets:: 5  
Formal Drawings?: YES  
Application Type:: UTILITY  
Docket Number:: FQ5-481

REPRESENTATIVE INFORMATION

Representative Customer Number:: 000466

PRIOR FOREIGN APPLICATION

Foreign Application One:: 199510/1999  
Filing Date:: JULY 13, 1999  
Country:: JAPAN  
Priority Claimed:: YES

## CALL ADMISSION CONTROL METHOD AND SYSTEM

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to call admission control techniques in an ATM (asynchronous transfer mode) switch, and more particularly to call admission control method and system for use in the ATM switch handling QoS(quality of service)-specified and QoS-unspecified virtual connections.

#### 2. Description of the Related Art

In a local-area network (LAN) environment including ATM LANs and legacy LANs, a bandwidth management technique of ATM connections is needed to operate an application requiring a high quality, such as the case of video service.

As an example, a CAC ATM-connection bandwidth management system has been disclosed in Japanese Patent Application Unexamined Publication No. 10-271116. This conventional system is provided with a per-connection bandwidth monitor, allowing CAC (Call Admission Control) information to be calculated and displayed on screen.

Further, the conventional system is provided with a simulator for predicting an available connection bandwidth.

Call Admission Control (CAC) is a function of determining whether a connection request is admitted or

FQ5-481

2

denied. More specifically, CAC determines whether the connection request can be accepted at SVC (switched virtual connection) call origination time. The connection request can be accepted only if the QoS for all existing virtual connections would still be satisfied if the request was accepted.

However, the conventional CAC has disadvantages in the case where a network using UBR (unspecified bit rate) traffic as normal traffic such as LAN emulation is connected to another network handling QoS-specified virtual connections such as CBR (constant bit rate) or VBR (variable bit rate) virtual connections.

More specifically, as shown in Fig. 4B, it is assumed that the full bandwidth of a line is  $B$ , of which a certain portion  $A_{QoS}$  is already assigned to CBR/VBR traffic virtual connections and further a portion is assigned to a UBR traffic virtual connection. In this case, if the requested bandwidth  $R$  of a CBR traffic virtual connection is smaller than the available bandwidth  $A_f = (B - A_{QoS})$ , then the connection request is accepted regardless of the UBR traffic virtual connection, which may cause the UBR-traffic virtual connection to be suddenly disconnected.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide

FQ5-481

3

a call admission control method and system allowing flexible and reliable call admissions at an ATM switch in the case of an ATM network including both QoS-specified and QoS-unspecified virtual connections.

5           According to the present invention, a call admission control method includes the steps of: a) receiving a QoS (Quality of Service) specified connection request; b) calculating an assigned bandwidth on a link associated with the QoS-specified connection request; c) calculating an  
10           estimated bandwidth to be assigned to an existing QoS-unspecified traffic on the link associated with the QoS-specified connection request; and d) determining whether the QoS-specified connection request is accepted, based on a combination of the assigned bandwidth and the estimated  
15           bandwidth.

          In the step (c), the estimated bandwidth on the link may be obtained based on an average QoS-unspecified traffic of each QoS-unspecified virtual connection existing on the link associated with the QoS-specified connection request.  
20           The average QoS-unspecified traffic may be calculated by adding up existing QoS-unspecified traffics obtained at predetermined sampling time intervals.

          The step (c) may include the steps of: adding up existing QoS-unspecified traffics obtained at  
25           predetermined sampling time intervals to produce a first average QoS-unspecified traffic; sequentially storing a first average QoS-unspecified traffic each time a

03645719.074300  
005/032

FQ5-481

4

corresponding QoS-unspecified connection is established at the ATM switch; and calculating the estimated bandwidth by averaging a predetermined number of first average QoS-unspecified traffics stored.

5           The step (d) may include the steps of: adding the assigned bandwidth and the estimated bandwidth to produce an currently assigned bandwidth in the link; calculating an available bandwidth of the link by subtracting the currently assigned bandwidth from a full bandwidth of the link; and  
10       determining whether the QoS-specified connection request is accepted, depending on a comparison of the available bandwidth and a requested bandwidth of the QoS-specified connection request.

          According to anther aspect of the present invention,  
15       a call admission control system in an ATM switch having a plurality of links connected thereto, includes: a traffic monitor for monitoring a QoS-unspecified traffic for each QoS-unspecified connection existing on each link; a memory for storing a cell traffic management table containing an  
20       average QoS-unspecified traffic for each QoS-unspecified connection existing on each link; and a call admission manager for calculating an estimated bandwidth by adding up average QoS-unspecified traffics for all existing QoS-  
25       unspecified connections on a link associated with a QoS-specified connection request, wherein the estimated bandwidth is a bandwidth to be assigned to the existing QoS-unspecified connections on the link, and determining

FQ5-481

5

whether the QoS-specified connection request is accepted, based on a combination of the estimated bandwidth and an assigned bandwidth that is already assigned in the link.

According to further another aspect of the present invention, a call admission control system in an ATM switch having a plurality of links connected thereto, includes: a traffic monitor for monitoring a QoS-unspecified traffic for each QoS-unspecified connection existing on each link; a calculator for adding up existing QoS-unspecified traffics obtained at predetermined sampling time intervals to produce a first average QoS-unspecified traffic, and calculating the estimated bandwidth by averaging a predetermined number of first average QoS-unspecified traffics stored; a memory for storing a cell traffic management database sequentially containing a first average QoS-unspecified traffic each time a QoS-unspecified connection is established at the ATM switch; and a call admission manager for calculating an estimated bandwidth by adding up first average QoS-unspecified traffics for all existing QoS-unspecified connections on a link associated with a QoS-specified connection request, wherein the estimated bandwidth is a bandwidth to be assigned to the existing QoS-unspecified connections on the link, and determining whether the QoS-specified connection request is accepted, based on a combination of the estimated bandwidth and an assigned bandwidth that is already assigned in the link.

Since CAC is performed taking into account the



FQ5-481

6

bandwidth that is already assigned to the existing QoS-  
unspecified virtual connection, the UBR-traffic  
communication is prevented from being suddenly disconnected  
even in the case of occurrence of a request for a QoS-  
5 specified virtual connection requiring a bandwidth greater  
than the current available bandwidth of a corresponding  
link.

Since a necessary bandwidth is dynamically assigned  
to the existing UBR-traffic virtual connection, an available  
10 bandwidth at that time can be efficiently assigned to a  
QoS-specified virtual connection request.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a basic configuration  
15 of an ATM switch employing a CAC method according to an  
embodiment of the present invention;

Fig. 2A is a diagram showing the field structure of  
a cell traffic management table as shown in Fig. 1;

Fig. 2B is a diagram showing the field structure of  
20 a call admission management table employed in the  
embodiment;

FQ5-481

7

Fig. 3 is a diagram showing an operation of the ATM switch as shown in Fig. 1;

Fig. 4A is a schematic diagram showing a CAC operation according to the embodiment of the present invention;

5 Fig. 4B is a schematic diagram showing a conventional CAC operation; and

Fig. 5 is a diagram showing a cell traffic management database for use in an ATM switch employing a CAC method according to another embodiment of the present invention.

#### 10 DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in Fig. 1, it is assumed for simplicity that an ATM switch has two input ports, two output ports and a control section. The ATM switch according to an embodiment of the present invention is basically structured by input  
15 line modules 1 and 2 each connected to the input lines, an ATM cell switch 3, output line modules 4 and 5 each connected to the output lines, CPU/SW interface 6, a data processor (CPU) 10, and a memory 20 storing a cell traffic management table 21.

20 Each of the input line modules 1 and 2 extracts cells from transmission frames on a corresponding incoming line

FQ5-481

and counts the number of received cells for each virtual connection. Each of the input line modules 1 and 2 is provided with a counter for counting received cells. At request of the data processor 10, the receiving cell count  
5 is output to the data processor 10 through the CPU/SW interface 6 as described later.

The ATM cell switch 3 performs the routing of cells arriving at each input line to the required output line by mapping the VPI/VCI in the header of the incoming cell into  
10 the corresponding output VPI/VCI using virtual connection management information that is previously installed in the ATM cell switch 3. In this way, a cell arriving at each input line module is transferred to the required output line module through the ATM cell switch 3.

Each of the output line modules 4 and 5 is provided with a buffering section for transmission queue management and a counter for counting the number of cells transmitted to a corresponding outgoing line for each virtual connection. At request of the data processor 10, the transmitting cell  
15 count is output to the data processor 10 through the CPU/SW interface 6 as described later.

The CPU/SW interface 6 is designed to exchange the signaling protocol for SVC call control and cell traffic data between the ATM cell switch 3 and the data processor 10.

25 The data processor 10 is a program-controlled processor used for control of the ATM switch. The data processor 10 implements the following functions by software

FQ5-481

9

processing: SVC call controller 11, call admission decision manager 12, and cell traffic computation section 13.

The SVC call controller 11 processes the signaling protocol for setup and release of a SVC call and extracts parameters of bandwidth and traffic type for each call setup request. The extracted parameters are transferred as information necessary for call setup processing to the call admission decision manager 12. Further, the SVC call controller 11 outputs the results of setup and release of a SVC call to the ATM cell switch 3 through the CPU/SW interface 6. In the ATM cell switch 3, the virtual connection management information is updated depending on the received setup and release results.

The call admission decision manager 12 determines whether a connection request is accepted, depending on the parameters of the connection request and the UBR traffic data received from the cell traffic computation section 13. The details will be described later.

The cell traffic computation section 13 adds up the receiving and transmitting cell counts inputted from the input line modules 1 and 2 and the output line modules 4 and 5 and manages the cell traffic management table 21. The details will be described later.

#### TABLE STRUCTURE

Referring to Fig. 2A, the cell traffic management table 21 can contain N records and has the following fields: Index D31, Line Number D32, VPI value D33, VCI value D34, Average

FQ5-481

10

reception traffic (ART) D35, Average transmission traffic (ATT) D36, and Type of traffic D37. The Line Number D32 indicates an identification number of one of the input line modules and the output line modules. The VPI value D33 and VCI value D34 indicate VPI and VCI in the header of a cell. A combination of the Line number D32, the VPI value D33, and the VCI value D34 identifies a single virtual connection indicated by the Index D31.

The Average reception traffic (ART) D35 indicates the average amount of traffic arriving at the input line module identified by the Line number D32. Similarly, the Average transmission traffic (ATT) D36 indicates the average amount of traffic transmitting from the output line module identified by the Line number D32.

An average traffic may be calculated from the number of cells per second. For example, the cell traffic computation section 13 samples the count value of the counter provided in each of the input and output line modules once per second and then calculates the differential average of 10 sampled counts.

The traffic type D37 indicates the type of the connection identified by the Index S31. Here, the traffic type D37 indicates whether the connection is of UBR traffic. Therefore, the cell traffic computation section 13 can calculate an average reception/transmission traffic of all UBR-traffic virtual connections currently established in a certain input/output line module by adding up N records

FQ5-481

11

contained in the cell traffic management table 21.

Referring to Fig. 2B, a call admission management table is also used for conventional CAC operation. The call admission management table can contain N records and has the following fields: Index D41, Line Number D42, VPI value D43, VCI value D44, Assigned bandwidth D45, and Type of traffic D37. The fields D41-D44 and D46 are the same as those of the cell traffic management table 21 as described before. The Assigned bandwidth D45 indicates the bandwidth currently used or occupied by CBR/VBR/UBR-traffic virtual connections. Therefore, by referring to the call admission management table and the cell traffic management table 21, as described hereafter, the call admission decision manager 12 can determine whether a connection request is accepted. It is possible to add the Assigned-bandwidth field D45 to the cell traffic management table 21.

#### OPERATION

Referring to Fig. 3, when receiving a QoS-specified connection request for a CBR/VBR-traffic virtual connection, the SVC call controller 11 extracts requested bandwidth and traffic type parameters from the request. The extracted parameters with the respective identification numbers of the input and output line modules involved are output to the call admission decision manager 12 (step (a)).

The call admission decision manager 12 inquires the cell traffic computation section 13 about the bandwidth currently assigned to UBR-traffic virtual connections on the

FQ5-481

12

involved input and output line modules (step (b)).

As described before, the cell traffic computation section 13 receives the receiving and transmitting cell counts from cell counters 51 and 52 in the input line module and the output line module involved in a corresponding virtual connection (steps (c) and (d)). Then, the cell traffic computation section 13 uses the receiving and transmitting cell counts to create a record including Average reception/transmission traffic in the cell traffic management table 53. Therefore, in response to the inquiry from the call admission decision manager 12, the cell traffic computation section 13 adds up N records to calculate an average reception/transmission traffic of all UBR-traffic virtual connections currently established in the input and output line modules. The average reception/transmission traffic of the existing UBR-traffic virtual connections is sent back as an estimated UBR traffic to the call admission decision manager 12 (step (f)).

The call admission decision operation will be described with reference to Fig. 4A.

Referring to Fig. 4A, the call admission decision manager 12 calculates the bandwidth  $A_{qos}$  already assigned to the CBR/VBR-traffic virtual connections by referring to the Assigned bandwidth field D45 of the call admission management table (see Fig. 2B). Further, the call admission decision manager 12 receives the estimated UBR traffic from the cell traffic computation section 13 and calculates an

FQ5-481

13

average bandwidth  $A_{UBR}$  as an estimated bandwidth to be assigned to the existing UBR-traffic virtual connections. In other words, as shown in Fig. 4A, of the full bandwidth of a line is  $B$ , the portion  $A_{QOS}$  is already assigned to CBR/VBR traffic virtual connections and the average bandwidth  $A_{UBR}$  is assumed to be already assigned to UBR traffic virtual connections.

In this case, if the requested bandwidth  $R$  of the CBR traffic virtual connection is smaller than the available bandwidth  $A_F = (B - A_{QOS} - A_{UBR})$ , then the connection request is accepted because the existing UBR traffic virtual connections are substantially protected. If the requested bandwidth  $R$  of the CBR traffic virtual connection is greater than the available bandwidth  $A_F = (B - A_{QOS} - A_{UBR})$ , then the connection request is denied as shown in Fig. 4A. If the connection request were accepted in this condition, then the existing UBR-traffic virtual connection would be suddenly disconnected or impaired. According to the present embodiment, such a sudden disconnection or impairment of the existing UBR-traffic virtual connection can be avoided. Such a call admission decision result is sent back to the SVC call controller 11 (step (g)).

#### ANOTHER EMBODIMENT

Another embodiment of the present invention is obtained by replacing the cell traffic management table 21 as shown in Fig. 1 with a cell traffic management database and changing the cell traffic computation program of the cell



FQ5-481

14

traffic computation section 13.

As shown in Fig. 5, the cell traffic management database stores a history of cell traffic management table, that is, not only a cell traffic management table at time instant  $t_n$  but also past cell traffic management tables at time instants  $t_{n-1}$ ,  $t_{n-2}$ , ... . At each of time instants  $t_n$ ,  $t_{n-1}$ ,  $t_{n-2}$ , ... , as described before, the cell traffic computation section 13 calculates a first average reception/transmission traffic of all UBR-traffic virtual connections currently established in the input and output line modules.

According to this embodiment, in response to the inquiry from the call admission decision manager 12, the cell traffic computation section 13 calculates an estimated average reception/transmission traffic of all UBR-traffic virtual connections currently established in the input and output line modules by adding up first average reception/transmission traffics obtained over a time period from the current time instant  $t_n$  to the predetermined past time instants  $t_{n-1}$ ,  $t_{n-2}$ , ... . Therefore, even in the case of burst-like UBR traffic, a more equitable call admission control can be achieved.

Alternatively, it is possible to sequentially store UBR traffic obtained each time the switching of the ATM switch for UBR traffic is performed. Such UBR traffic data can be used to achieve the similar advantage.

Since the present embodiment can be implemented by only

16

5 control and an effective utilization of bandwidth in an ATM  
network become possible.

1. The first group of people who are interested in the study of the history of the United States are the people who are interested in the history of the United States.

FQ5-481

16

What is claimed is:

1. A call admission control method in an ATM switch, comprising the steps of:

a) receiving a QoS (Quality of Service) specified  
5 connection request;

b) calculating an assigned bandwidth on a link associated with the QoS-specified connection request;

c) calculating an estimated bandwidth to be assigned to an existing QoS-unspecified traffic on the link  
10 associated with the QoS-specified connection request; and

d) determining whether the QoS-specified connection request is accepted, based on a combination of the assigned bandwidth and the estimated bandwidth.

2. The call admission control method according to  
15 claim 1, wherein in the step (c), the estimated bandwidth on the link is obtained based on an average QoS-unspecified traffic of each QoS-unspecified virtual connection existing on the link associated with the QoS-specified connection request.

3. The call admission control method according to  
20 claim 2, wherein the average QoS-unspecified traffic is calculated by adding up existing QoS-unspecified traffics obtained at predetermined sampling time intervals.

FQ5-481

17

4. The call admission control method according to claim 1, wherein the step (c) comprises the steps of:

c.1) adding up existing QoS-unspecified traffics obtained at predetermined sampling time intervals to produce a first average QoS-unspecified traffic;

c.2) sequentially storing a first average QoS-unspecified traffic each time a corresponding QoS-unspecified connection is established at the ATM switch; and

c.3) calculating the estimated bandwidth by averaging a predetermined number of first average QoS-unspecified traffics stored.

5. The call admission control method according to claim 1, wherein the step (d) comprises the steps of:

d.1) adding the assigned bandwidth and the estimated bandwidth to produce an currently assigned bandwidth in the link;

d.2) calculating an available bandwidth of the link by subtracting the currently assigned bandwidth from a full bandwidth of the link; and

d.3) determining whether the QoS-specified connection request is accepted, depending on a comparison of the available bandwidth and a requested bandwidth of the QoS-specified connection request.

6. A call admission control system in an ATM switch

FQ5-481

18

having a plurality of links connected thereto, comprising:

a traffic monitor for monitoring a QoS-  
unspecified traffic for each QoS-unspecified connection  
existing on each link;

5 a memory for storing a cell traffic management  
table containing an average QoS-unspecified traffic for each  
QoS-unspecified connection existing on each link; and

a call admission manager for calculating an  
estimated bandwidth by adding up average QoS-unspecified  
10 traffics for all existing QoS-unspecified connections on a  
link associated with a QoS-specified connection request,  
wherein the estimated bandwidth is a bandwidth to be assigned  
to the existing QoS-unspecified connections on the link, and  
determining whether the QoS-specified connection request is  
15 accepted, based on a combination of the estimated bandwidth  
and an assigned bandwidth that is already assigned in the  
link.

7. The call admission control system according to  
claim 6, wherein an average QoS-unspecified traffic is  
20 calculated by adding up existing QoS-unspecified traffics  
obtained at predetermined sampling time intervals.

8. The call admission control method according to  
claim 6, wherein the call admission manager adds the assigned  
bandwidth and the estimated bandwidth to produce an  
25 currently assigned bandwidth in the link, calculates an

FQ5-481

19

available bandwidth of the link by subtracting the currently assigned bandwidth from a full bandwidth of the link, and determines whether the QoS-specified connection request is accepted, depending on a comparison of the available  
5 bandwidth and a requested bandwidth of the QoS-specified connection request.

9. A call admission control system in an ATM switch having a plurality of links connected thereto, comprising:

a traffic monitor for monitoring a QoS-  
10 unspecified traffic for each QoS-unspecified connection existing on each link;

a calculator for adding up existing QoS-  
unspecified traffics obtained at predetermined sampling time intervals to produce a first average QoS-unspecified  
15 traffic, , and calculating the estimated bandwidth by averaging a predetermined number of first average QoS-unspecified traffics stored:

a memory for storing a cell traffic management database sequentially containing a first average QoS-  
20 unspecified traffic each time a QoS-unspecified connection is established at the ATM switch; and

a call admission manager for calculating an estimated bandwidth by adding up first average QoS-unspecified traffics for all existing QoS-unspecified  
25 connections on a link associated with a QoS-specified connection request, wherein the estimated bandwidth is a

FQ5-481

20

bandwidth to be assigned to the existing QoS-unspecified connections on the link, and determining whether the QoS-specified connection request is accepted, based on a combination of the estimated bandwidth and an assigned  
5 bandwidth that is already assigned in the link.

10. The call admission control method according to claim 9, wherein the call admission manager adds the assigned bandwidth and the estimated bandwidth to produce an  
10 currently assigned bandwidth in the link, calculates an available bandwidth of the link by subtracting the currently assigned bandwidth from a full bandwidth of the link, and determines whether the QoS-specified connection request is accepted, depending on a comparison of the available  
15 bandwidth and a requested bandwidth of the QoS-specified connection request.

034745729

21

## ABSTRACT OF THE DISCLOSURE


[illegible]



FQ5-481

1/5

FIG. 1

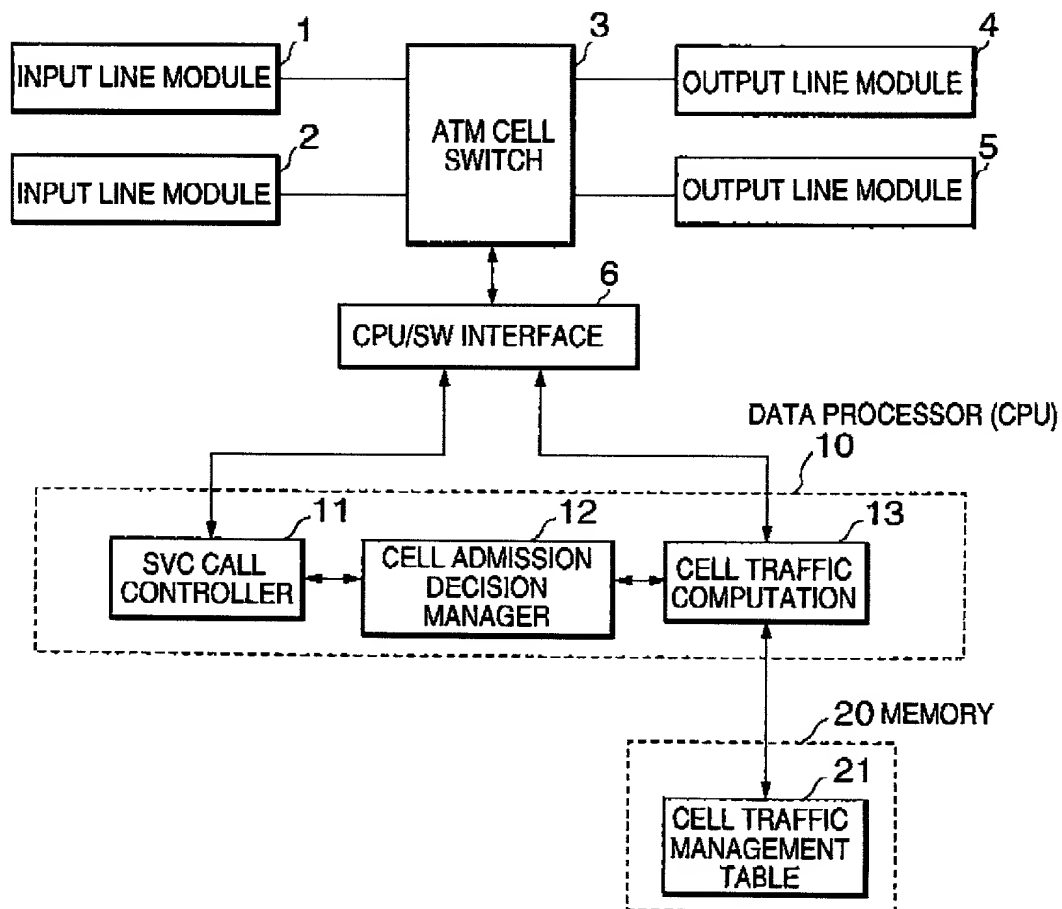

FQ5-481

2/5

FIG. 2A

CELL TRAFFIC MANAGEMENT TABLE

<div>D31      D32      D33      D34      D35      D36      D37</div>						
INDEX	LINE NO.	VPI	VCI	AVERAGE RECEPTION TRAFFIC(ART)	AVERAGE TRANSMISSION TRAFFIC(ATT)	TYPE OF TRAFFIC
1						
2						
⋮						
N						

FIG. 2B


CELL ADMISSION MANAGEMENT TABLE

<div>D41      D42      D43      D44      D45      D46</div>					
INDEX	LINE NO.	VPI	VCI	ASSIGNED BANDWIDTH	TYPE OF TRAFFIC
1					
2					
⋮					
N					

FQ5-481

3/5

FIG. 3

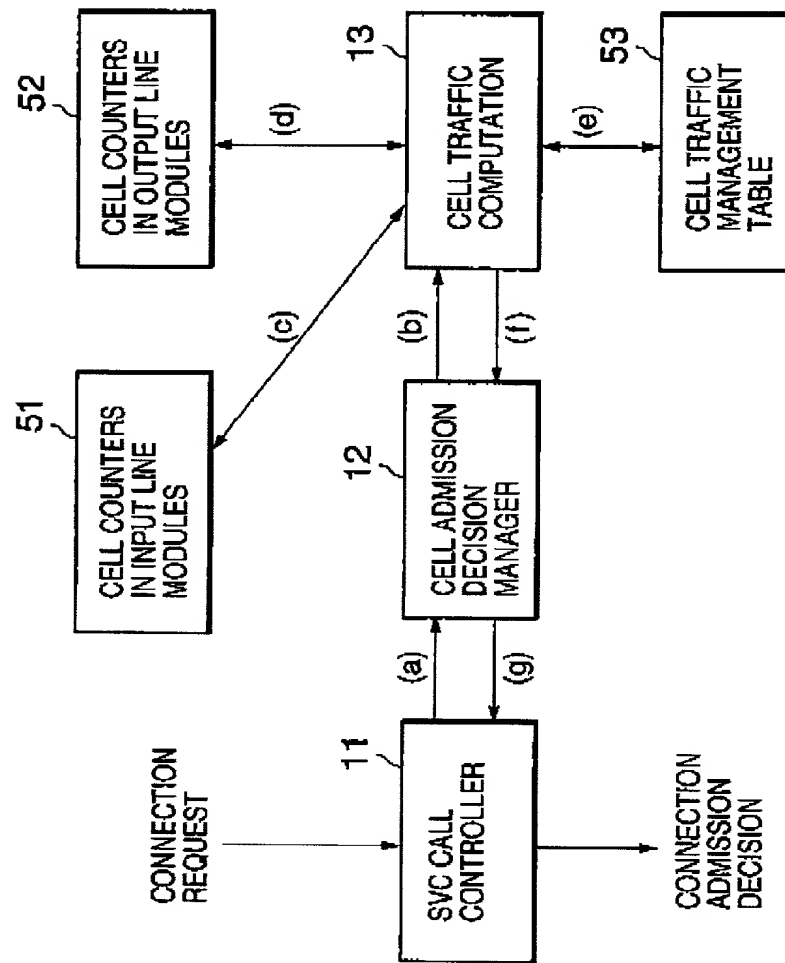

FQ5-481

4/5

FIG. 4A


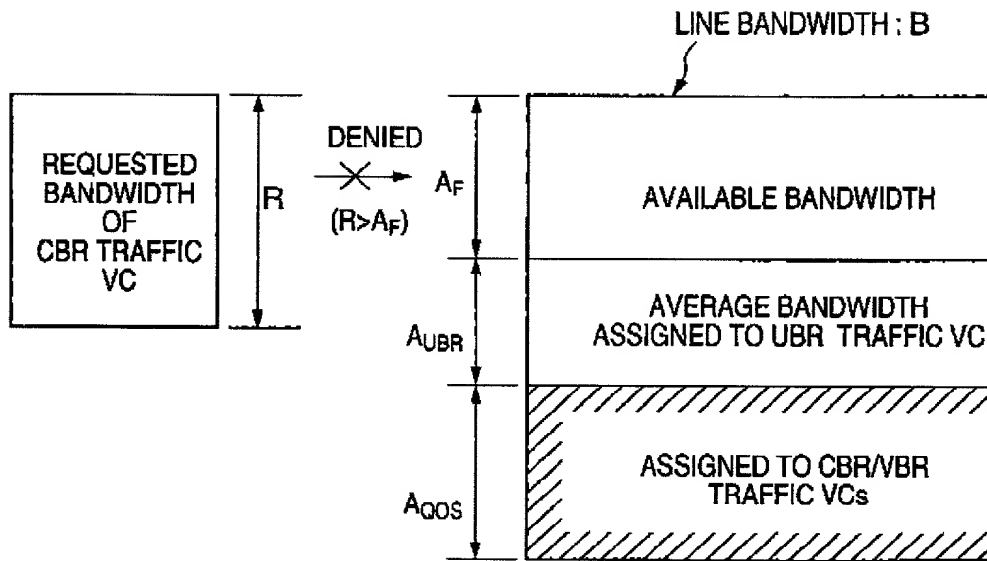



FIG. 4B (PRIOR ART)

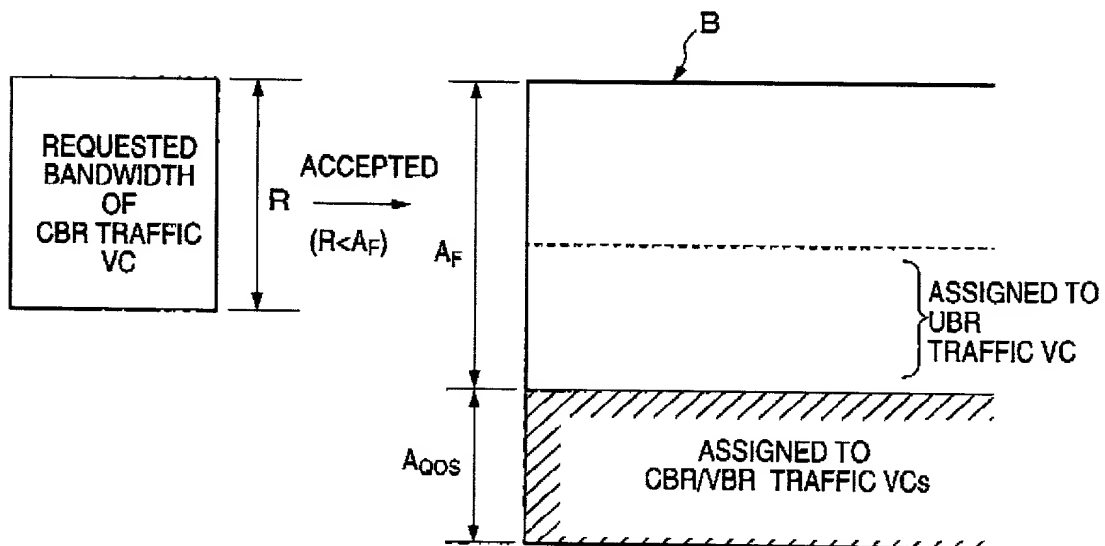

FQ5-481

5/5

FIG. 5

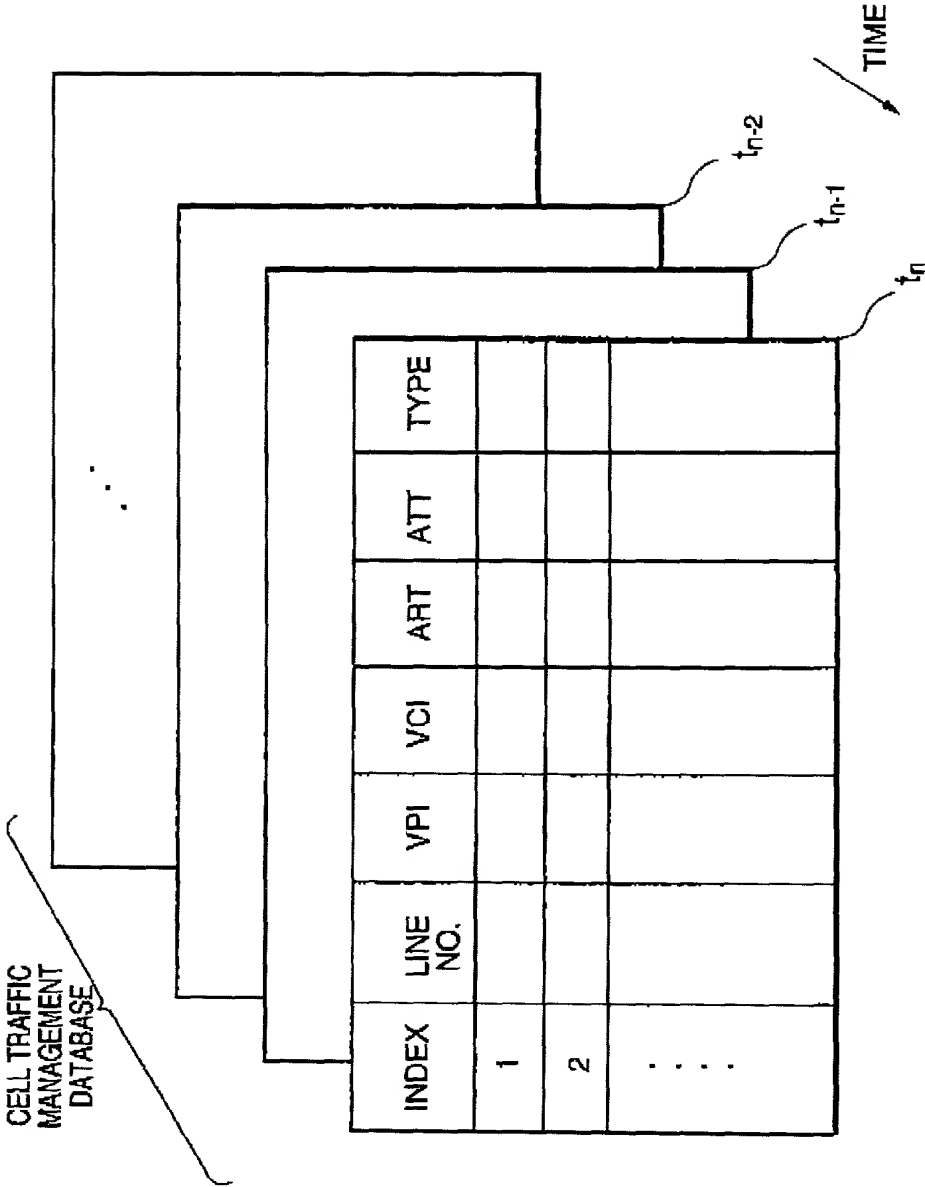

Ref.

(Status--patented, pending, abandoned)

## POWER OF ATTORNEY

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from \_\_\_\_\_ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: **Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoît CASTEL, Reg. No. 35,041, Eric JENSEN, Reg. No. 37,855, and Thomas W. PERKINS, Reg. No. 33,027, c/o YOUNG & THOMPSON, Second Floor, 745 South 23rd Street, Arlington, Virginia 22202.**

Address all telephone calls to Young & Thompson at 703/521-2297.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor:

(given name, family name)

Inventor's signature

Rei Miyamoto (Seal)  
REI MIYAMOTO

Date July 7, 2000

Residence: Tokyo, Japan

Citizenship: Japanese

Post Office Address: c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku,  
Tokyo, Japan

Full name of second joint inventor, if any:

(given name, family name)

Inventor's signature

Date

Residence:

Citizenship:

Post Office Address:

Full name of third joint inventor, if any:

(given name, family name)

Inventor's signature

Date

Residence:

Citizenship:

Post Office Address: